


## OYSTER LIGHT FITTINGS

This stylish ceiling mount LED oyster light fitting with aluminium anodised base and acrylic opal diffuser is ideal for a range of lighting applications where a wide light spread is required. The SMO CT series downlight has a variable colour range adjustment from warm white to cool white depending on the mood required in the room. This fitting is also dimmable to give even further flexibility in lighting controlled by the G-Smart App or the hand held remote. The fitting is suitable for a range of home lighting or commercial applications.

Product Code	Voltage (V)	Wattage (W)	Power Factor	Luminous Flux (Lm)	Dimensions	CRI	Colour temp	Dimmable
SMO15D	240V AC	15W	>0.85	1300(CW)	290x92mm	> 80	3200/5000K/CT	Yes
SMO20D	240V AC	20W	>0.85	1800(CW)	355x105mm	> 80	3200/5000K/CT	Yes
SMO30D	240V AC	30W	>0.85	2700(CW)	400x115mm	> 80	3200/5000K/CT	Yes
SMO15F	240V AC	15W	>0.85	1300(CW)	290x92mm	> 80	3200/5000K/CT	Yes
SMO20F	240V AC	20W	>0.85	1800(CW)	355x105mm	> 80	3200/5000K/CT	Yes
SMO30F	240V AC	30W	>0.85	2500(CW)	400x115mm	> 80	3200/5000K/CT	Yes

Ambient temperature range -20°C~+50°C

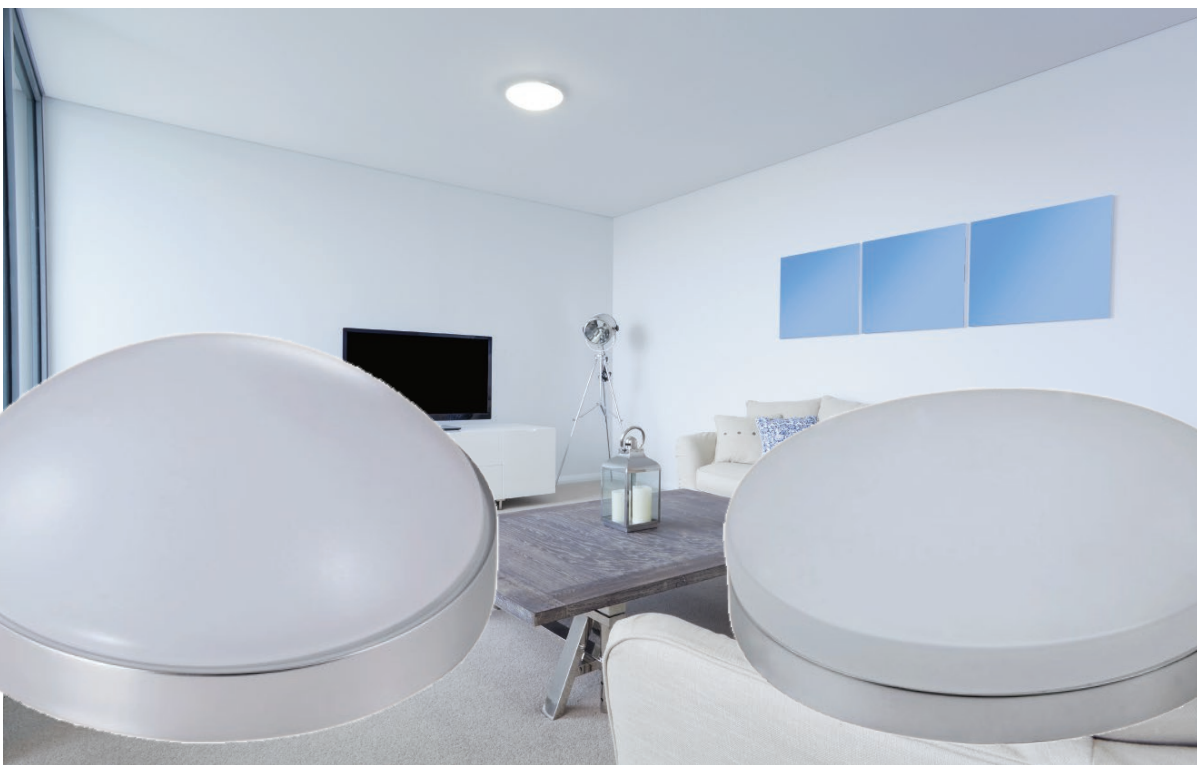

SMO CT series can be controlled with G-Smart App and control your lighting from anywhere



The hand held remote can be used for local wireless control only available for SMO CT series

