


# WEATHERPROOF BATTEN FITTINGS

Surface mount weatherproof batten fittings are made with an aluminium base and PC cover making the construction strong and durable and can also be surface or suspension mounted. Simple to install with its slim line design it can be used in a wide range of applications. This product provides the same light output to match conventional fluorescent tube fittings and with its IP65 rating it is ideal for outdoor areas.

Product Code	Voltage (V)	Wattage (W)	Power Factor	Luminous Flux (Lm)	Beam Angle	CRI	Colour temp	Size	Dimmable
SB-60	240V AC	20W	>0.85	1800	120	> 80	3000K-6000K	84w x 46h	Optional
SB-120	240V AC	40W	>0.85	3600	120	> 80	3000K-6000K	84w x 46h	Optional
SB-150	240V AC	60W	>0.85	5400	120	> 80	3000K-6000K	84w x 46h	Optional

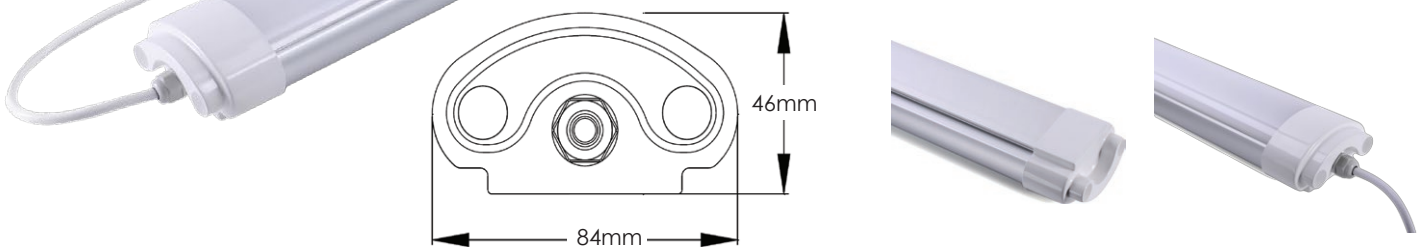

SB-60 BEAM ANGLE 120 DEG		
Distance (M)	Avg/Max (lux)	Diameter (M)
1	647	2.7
2	161	5.3
3	72	8
4	40	10.6
5	26	13.3

SB-120 BEAM ANGLE 120 DEG		
Distance (M)	Avg/Max (lux)	Diameter (M)
1	1416	2.7
2	354	5.3
3	157	8
4	88	10.6
5	56	13.3

SB-150 BEAM ANGLE 120 DEG		
Distance (M)	Avg/Max (lux)	Diameter (M)
1	2101	2.7
2	525	5.3
3	233	8
4	131	10.6
5	84	13.3