


SURFACE MOUNT LINKABLE LIGHT FITTINGS

Surface mount Linkable light fittings are made with an aluminium base and PC cover making the construction strong and durable. Simple to install via a plug in method end to end and requires no wiring. Designed for installation in a wide range of uses this product provides a high light output at 130lm/W ideal for any lighting application.

Product Code	Voltage (V)	Wattage (W)	Power Factor	Luminous Flux (Lm)	Beam Angle	CRI	Max No. of links	Colour temp	Dimmable
LT-60	240V AC	20W	>0.9	2640	60/90/120	> 80	42	3000K-6000K	Optional
LB-120	240V AC	40W	>0.9	5320	60/90/120	> 80	35	3000K-6000K	Optional
LB-150	240V AC	55W	>0.9	7020	60/90/120	> 80	28	3000K-6000K	Optional

130lm/W

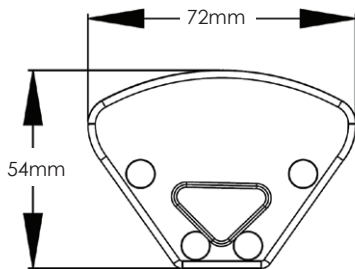

LB-60 BEAM ANGLE 120 DEG		
Distance (M)	Max (lux)	Diameter (M)
1	595	2.8
2	140	5.7
3	66	8.5
4	37	11.4
5	24	14.2

LB-120 BEAM ANGLE 120 DEG		
Distance (M)	Max (lux)	Diameter (M)
1	1323	2.8
2	331	5.7
3	147	8.5
4	82	11.4
5	53	14.2

LB-150 BEAM ANGLE 120 DEG		
Distance (M)	Max (lux)	Diameter (M)
1	2102	2.8
2	525	5.7
3	233	8.5
4	131	11.4
5	84	14.2

